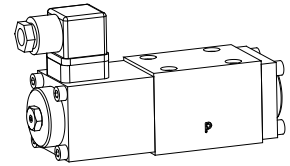


Proportional directional valve

- not pressure compensated
- $Q_{max} = 40$ l/min
- $Q_{Nmax} = 32$ l/min
- $p_{max} = 350$ bar

NG6
 ISO 4401-03

DESCRIPTION

Direct operated proportional spool valve in flange design NG6 acc. to ISO 4401-03/7790 with 4 ports. The spool valve is designed to the 5 chamber principle. The volume flow is adjusted by a Wandfluh proportional solenoid (VDE standard 0580). Low pressure drop due to the body design and spool profiling. The spool is made of hardend steel. The body made of high grade hydraulic casting for long service life is painted. The solenoid is zinc coated.

FUNCTION

Proportionally to the solenoid current spool stroke, spool opening and valve volume flow will increase. Proportional directional valves NG6 are not load-compensated. The optimum spool shape and progressive characteristics curve allow fine motion control. To control the valve Wandfluh proportional amplifiers are available (see register 1.13).

APPLICATION

Proportional directional spool valves are well suited for demanding applications where high resolution, high volume flow and low hysteresis are requested. They are implemented in industrial hydraulics as well as in mobile hydraulics for the smooth control of hydraulic actuators. Application examples: pitch control of wind generators, forest and earth moving machines, machine tools and paper production machines with simple position controls, robotics and fan control.

TYPE CODE

| | | | | | | | | | |
|--|--|---------|--------------------------|----------|--------------------------|----------|--------------------------|----------|--------------------------|
| WDP F A06 - <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/> # <input type="checkbox"/> | | | | | | | | | |
| Spool valve, direct operated, proportional | | | | | | | | | |
| Flange construction | | | | | | | | | |
| International standard interface ISO, NG6 | | | | | | | | | |
| Description of symbols acc. to table | | | | | | | | | |
| Nominal volume flow Q_N | <table border="1"> <tr><td>5 l/min</td><td><input type="checkbox"/></td></tr> <tr><td>10 l/min</td><td><input type="checkbox"/></td></tr> <tr><td>16 l/min</td><td><input type="checkbox"/></td></tr> <tr><td>32 l/min</td><td><input type="checkbox"/></td></tr> </table> | 5 l/min | <input type="checkbox"/> | 10 l/min | <input type="checkbox"/> | 16 l/min | <input type="checkbox"/> | 32 l/min | <input type="checkbox"/> |
| 5 l/min | <input type="checkbox"/> | | | | | | | | |
| 10 l/min | <input type="checkbox"/> | | | | | | | | |
| 16 l/min | <input type="checkbox"/> | | | | | | | | |
| 32 l/min | <input type="checkbox"/> | | | | | | | | |
| Nominal voltage U | <table border="1"> <tr><td>12 VDC</td><td><input type="checkbox"/></td></tr> <tr><td>24 VDC</td><td><input type="checkbox"/></td></tr> </table> | 12 VDC | <input type="checkbox"/> | 24 VDC | <input type="checkbox"/> | | | | |
| 12 VDC | <input type="checkbox"/> | | | | | | | | |
| 24 VDC | <input type="checkbox"/> | | | | | | | | |
| Design-Index (Subject to change) | | | | | | | | | |

GENERAL SPECIFICATIONS

| | |
|---------------------|--|
| Nominal size | NG6 acc. to ISO 4401-03/7790 |
| Designation | 4/2-, 4/3-way proportional directional valve |
| Construction | Direct operated spool valve |
| Mounting | Flange, 4 fixing holes for socket head cap screws M5x50 |
| Fastening torque | $M_D = 5,5$ Nm (screw qual. 8.8) |
| Pipe connection | Connection plates Multi-station flange subplate Longitudinal stacking system |
| Mounting position | any, preferably horizontal |
| Ambient temperature | -20...+50 °C |
| Weight: 4/2-way | $m = 2,0$ kg |
| 4/3-way | $m = 2,5$ kg |


HYDRAULIC SPECIFICATIONS

| | |
|--------------------------|--|
| Fluid | Mineral oil, other fluid on request |
| Contamination efficiency | ISO 4406:1999, class 18/16/13 (Required filtration grade $\beta_{6...10} \geq 75$) refer to data sheet 1.0-50/2 |
| Viscosity range | 12 mm ² /s...320 mm ² /s |
| Fluid temperature | -20...+70 °C |
| Working pressure | $p_{max} = 350$ bar (connections P, A, B) |
| Tank pressure | $p_{max} = 160$ bar (connection T) |
| Nominal volume flow | $Q_N = 5$ l/min, 10 l/min, 16 l/min, 32 l/min |
| Max. volume flow | see characteristic |
| Leakage volume flow | on request |
| Hysteresis | $\leq 5\%$ * * at optimal dither signal |

ELECTRICAL SPECIFICATIONS


| | | |
|---------------------------------|---|----------------|
| Construction | Proportional solenoid, wet pin push type, pressure tight | |
| Standard-Nominal voltage | U = 12 VDC | U = 24 VDC |
| Limiting current | $I_G = 1780$ mA | $I_G = 810$ mA |
| Relative duty factor | 100% DF (see data sheet 1.1-430) | |
| Protection class | IP 65 acc. to EN 60529 | |
| Connection/Power supply | Over device plug connection acc. to ISO 4400/DIN 43650 (2P+E) | |
| Other electrical specifications | see data sheet 1.1-130 (PI45V) | |

TYPE CHARTS / DESIGNATIONS OF SYMBOLS

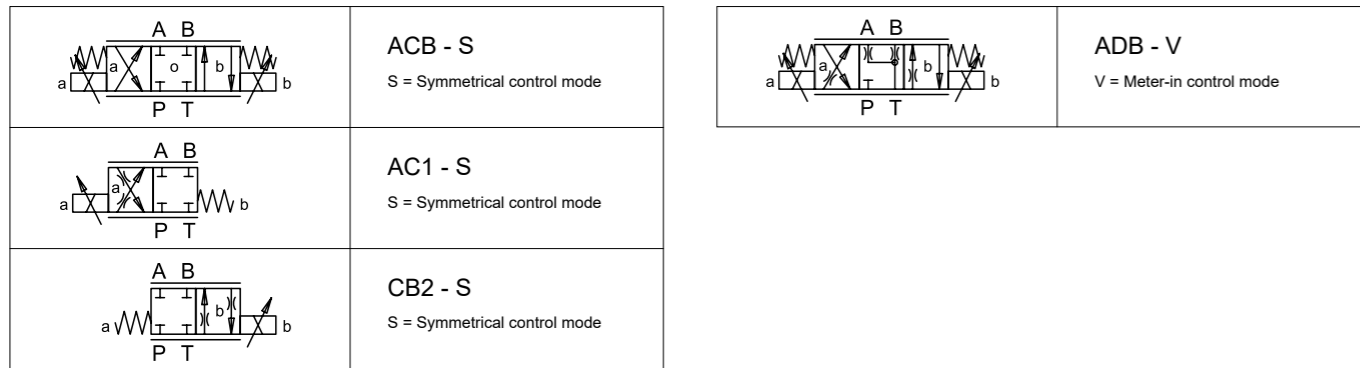


CHARACTERISTICS oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$


Q = f (p) Volume flow pressure characteristics (l = l₀)
[Types: ACB-S, AC1-S, CB2-S]

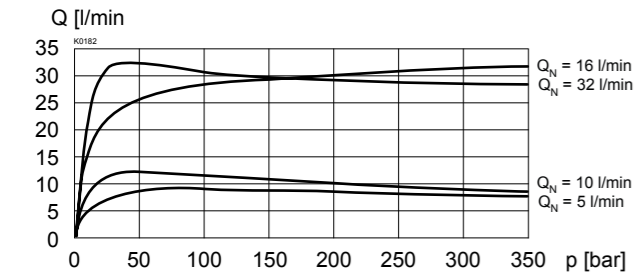


Q = f (p) Volume flow pressure characteristics (l = l₀)
[Type: ADB-V]

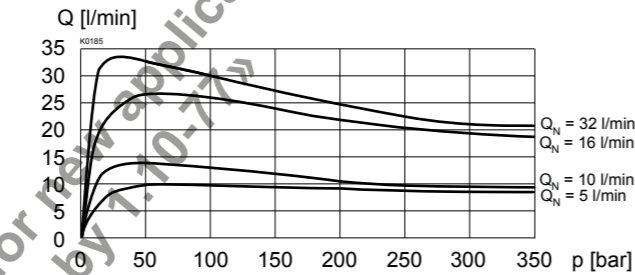


Δp = f (Q) Pressure loss/flow characteristics (l = l₀)
[Types: ACB-S, AC1-S, CB2-S]

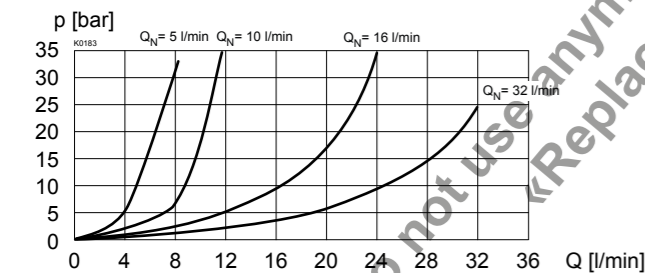


Δp = f (Q) Pressure loss/flow characteristics (l = l₀)
[Type: ADB-V]

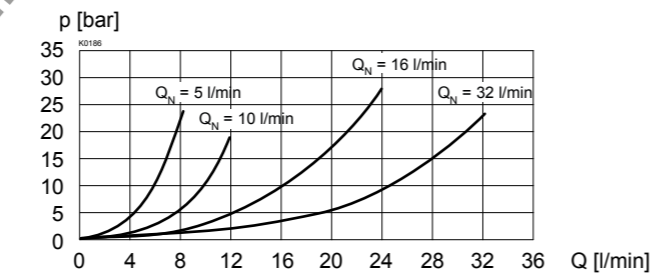

Q = f (l) Volume flow adjustment characteristics (Δp = 10 bar)
[Types: ACB-S, AC1-S, CB2-S]

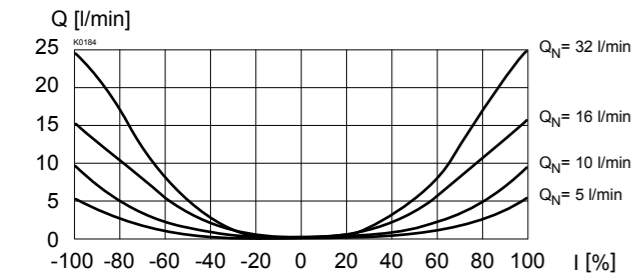


Q = f (l) Volume flow adjustment characteristics (Δp = 10 bar)
[Type: ADB-V]

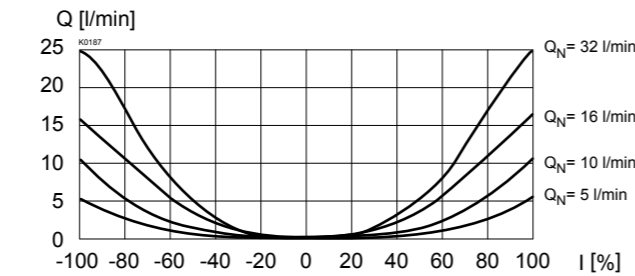



NOTE!
All values measured over 2 metering edges, A and B ports linked

DIMENSIONS

4/3-way valve

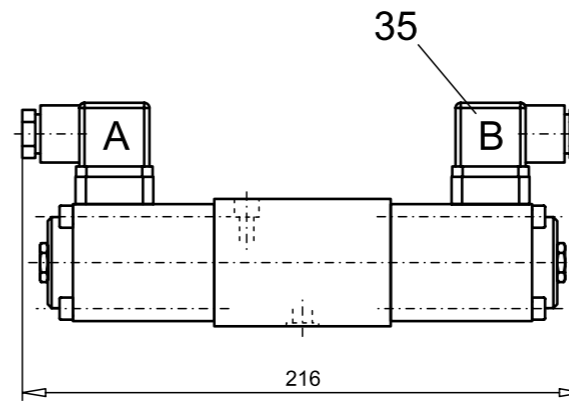

4/2-way valve

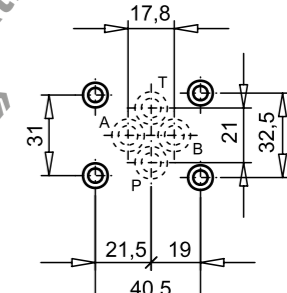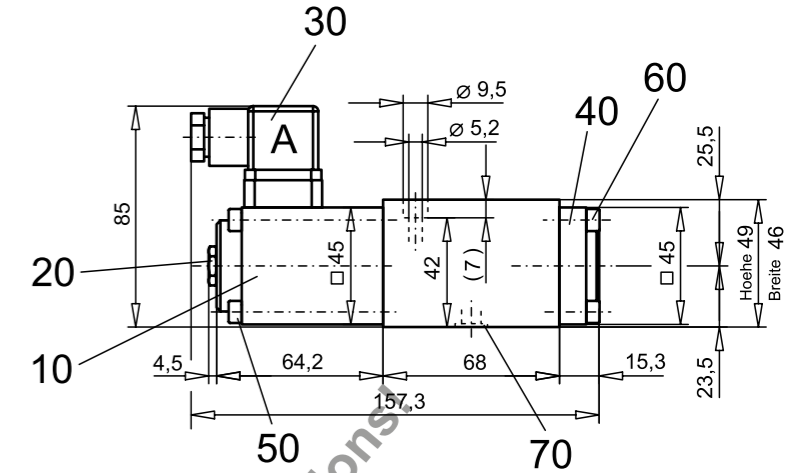

PARTS LIST

| Position | Article | Description |
|----------|----------------------|--|
| 10 | 256.4454 256.4418 | Proportional solenoid PI45V-G24 Proportional solenoid PI45V-G12 |
| 20 | 253.8001 | Plug with integrated manual override HB6 |
| 30 | 219.2001 | Plug A (grey) |
| 35 | 219.2002 | Plug B (black) |
| 40 | 058.4211 | Cover |
| 50 | 246.2160 | Socket head cap screw M5 x 60 DIN 912 |
| 60 | 246.2117 | Socket head cap screw M5 x 16 DIN 912 |
| 70 | 160.2093 | O-ring ID 9,25 x 1,78 |

ACCESSORIES

| | |
|------------------------|---------------|
| Sub-plates | Register 2.9 |
| Proportional-amplifier | Register 1.13 |

Technical explanation see data sheet 1.0-100